


SORTING GRAPPLE 0.6 - 55 TONS

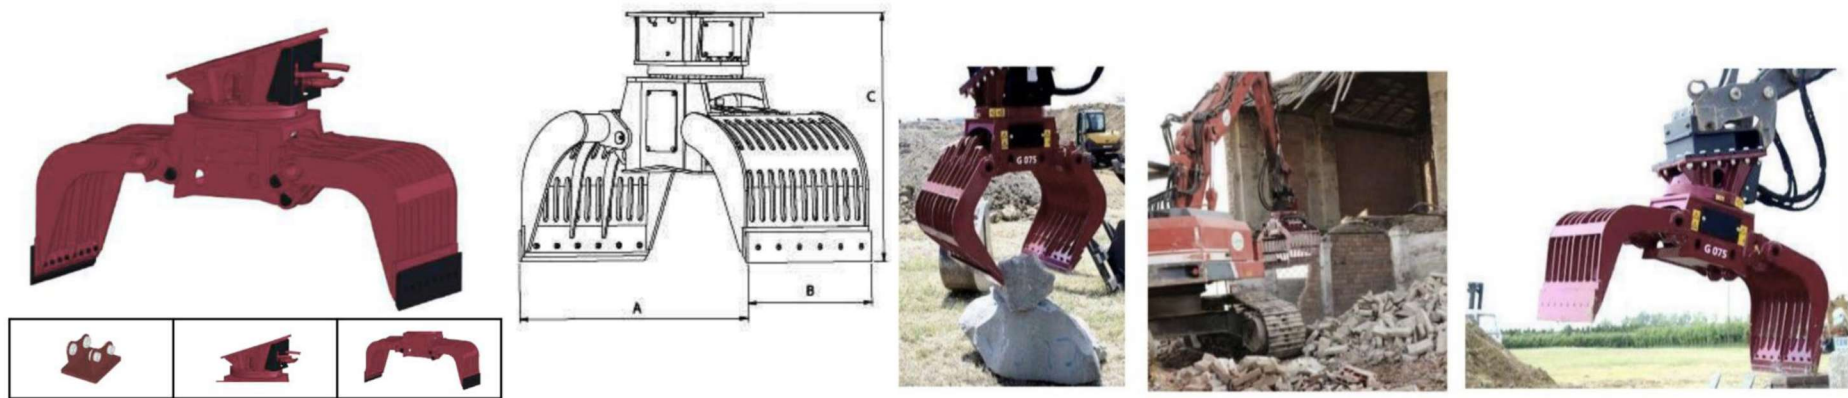

Excavator	Code	Weight	Force	A	B	C
Ton	Model	Kg.	Ton.	mm	mm	mm
0.6 - 2.0	TRG15	90	0.75	700	350	695
1.5 - 4.0	TRG30	125	0.75	920	350	850
3.0 - 6.0	TRG50	265	0.9	1230	450	1100
5.0 - 10.0	TRG100	370	5	1410	500	1140
9.0 - 14.0	TRG130	760	5	1650	700	1290
14.0 - 18.0	TRG160	1040	5.5	1760	800	1480
18.0 - 22.0	TRG200	1380	6	1885	1000	1525
22.0 - 30.0	TRG250	1780	10	2025	1200	1610
25.0 - 40.0	TRG300	2450	12	2200	1400	1700
35.0 - 55.0	TRG400	2800	14	2400	1500	1800

Selector grab for mini, midi and excavators from 1.5 up to 50 ton. This extremely versatile grab is widely employed for recycling, handling and demolition of non reinforced structures. It is used on construction sites for brick demolition, waste, wood, paper, aluminum and plastic handling, or where it is necessary to select or move material. It is considered a sort of "helping hand" of the construction site. Sturdy construction, high efficiency jaws movement, it features two jaws built in high tensile steel HB400 operated by an hydraulic cylinder and 360° hydraulic rotation. Upper flange easy to match with any kind of coupler, either direct or quick.